


DRILL DURING INSTALLATION  
USE EXISTING FASTENER  
THIS AREA.

ATTACH 2  
VELCRO STRIPS  
TO REAR


R/H CARGO  
COMPARTMENT  
COVER

### NOTES:

1. MAT'L: ALUM., 0.040 THICK, 2024-T3.  
QQ-A-250/5.
2. INSIDE BEND RADII: MIN. 3T, 90°
3. FINISH: ZINC CHROMATE PRIMER  
AND BLUE-GREEN ENAMEL  
PER AC4313 or POWDER COAT.

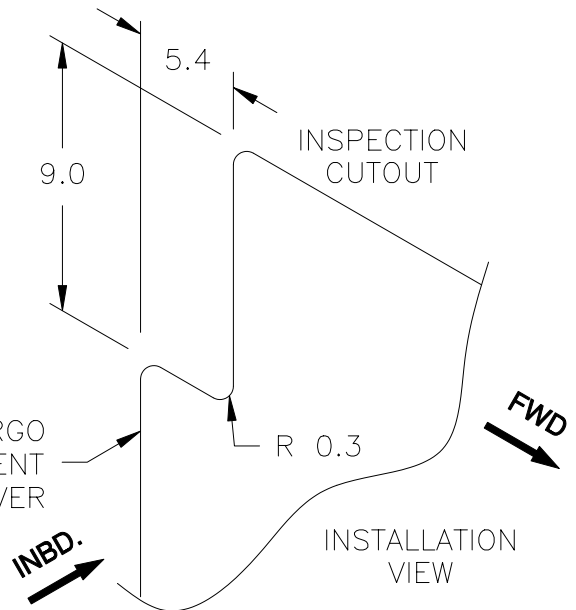

REVISION			
REV	DESCRIPTION	DATE	APROV.
A	— REDRAWN ON CAD. — UPDATED DRAWING FORMAT AND NOTES. — ECO 1036.	12/4/97	

BREAK ALL EDGES UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES DIMENSIONAL TOLERANCES  3 DECIMALS ± 2 DECIMALS ± .050 1 DECIMAL ± .100 ANGULAR ± 2°		DRAWN D. T.	DATE 7/17/90	 <b>GENEVA AVIATION</b> 10108 - 32nd Ave W Everett, WA 98204 (425)353-7400 FAX(425)347-7100
		CHECK	DATE	
		DESIGN	DATE	
		APPROVAL	DATE	
THIS DRAWING INCLUDES INFORMATION PROPRIETARY TO GENEVA AVIATION AND SHALL NOT BE USED OR DUPLICATED BY ANYONE WITHOUT THE WRITTEN PERMISSION OF GENEVA AVIATION INC.				TITLE INSPECTION COVER AND CUTOUT
		DWG NO.	G10035	REV. A
		PRO NO.	GA100	SIZE A
		SCALE	1/1	SHT. 1 OF 1